


# LUMIFLEX

## Magnetic Track System


Lumiflex is crafted with a focus on flexibility and effortless installation. Featuring multiple modules that can be seamlessly replaced and repositioned along the track, it delivers a level of customization that stands out in the industry. Whether you need lighting for commercial spaces, retail stores, hotels, residential areas, or exhibition halls, Lumiflex provides the perfect solution to meet your needs.



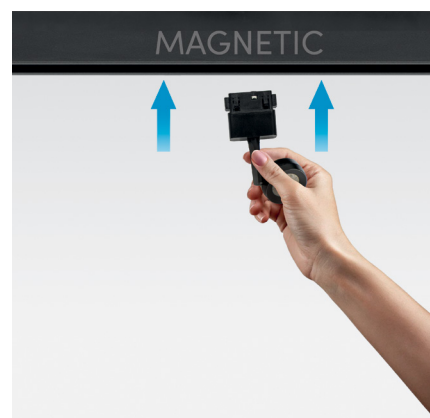

RAL COLORS

- Std.  9005
- Opt.  9016
-  9006

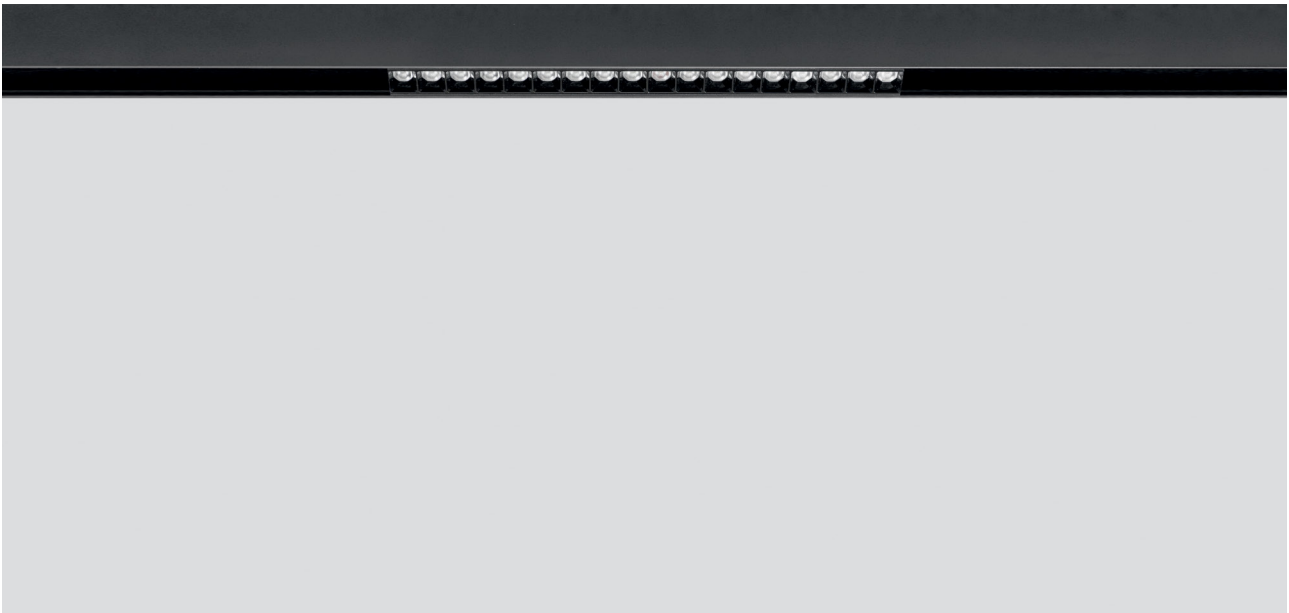

**MLA**



IP20  

Code	Beam Angle	Luminous Flux	System Power	Weight
MLA6	36°	420lm	6W	0.05 kg
MLA12	36°	840lm	12W	0.09 kg
MLA18	36°	1260lm	18W	0.135 kg
MLA24	36°	1680lm	24W	0.180kg

**Body:** Aluminum Injection  
**Driver:** Included  
**Lens:** PMMA

**Voltage:** 48VDC  
**CRI:** 90  
**Finishes:** Black

**Color Temperature:** 3000-4000-5000K, Tunable White  
**Led:** Mid-Power

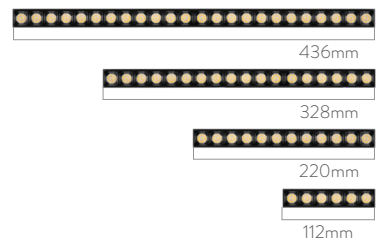



RAL COLORS

Std.

9005

Opt.

9016

9006

MLO

IP20  


Code	Beam Angle	Luminous Flux	System Power	Weight
MLO12	120°	820lm	12W	0.08 kg
MLO24	120°	1630lm	24W	0.14 kg




**Body:** Aluminum Injection  
**Driver:** Included  
**Diffuser:** Opal

**Voltage:** 48VDC  
**CRI:** 90

**Color Temperature:** 3000-4000-5000K, Tunable White  
**Led:** Mid-Power



Code	a
MLO12	218mm
MLO24	434mm



RAL COLORS


Std.

9005

Opt.

9016

9006

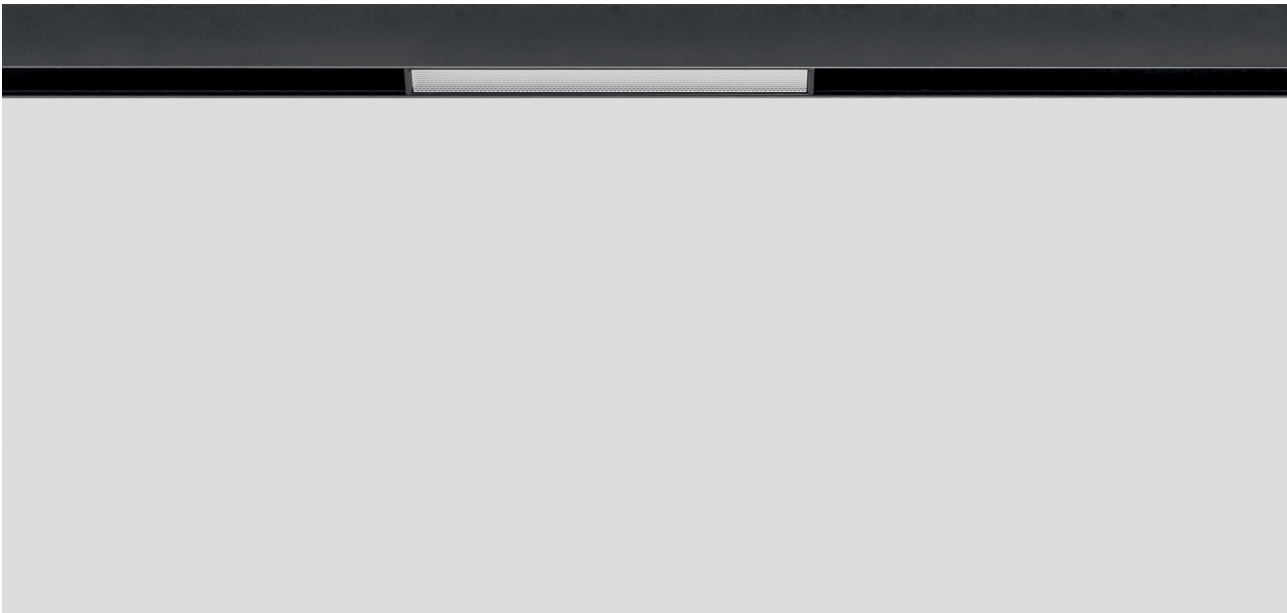

**MLP**

IP20


Code	Beam Angle	Luminous Flux	System Power	Weight
MLP12	110°	1100lm	12W	0.14 kg
MLP24	110°	2200lm	24W	0.14 kg

**HCL**

**Body:** Aluminum Injection  
**Driver:** Included  
**Diffuser:** Prismatic lens

**Finishes:** Black  
**Voltage:** 48VDC  
**CRI:** 90

**Color Temperature:** 3000-4000-5000K, Tunable White  
**Led:** Mid-Power



Code	a
MLP12	218mm
MLP24	434mm



