



MSG

Downlight

MSG downlight products have a wide variety of model structures. Downlight fixtures that appeal to wide usage areas can meet the needs of all kinds of places. While competing in elegance with decorative glass types, they create pleasant light effects on ceilings.

MSG luminaires offer common usage patterns thanks to their high efficiency and product types with different diameters. Materials and electronic components used with aluminum injection body and cooler structures maximize the life of the luminaires.

FRAMES



MSG 160

MSG 200

DIFFUSER


		14W	20W	27W	14W	20W	27W
Opal	MSG/O	■	■	■	■	■	■
WP	MSG/WP	■	■	■	■	■	■
Prismatic Glass	MSG/B					■	■
Decorative Glass	MSG/DC	■	■	■			
Frosted Transparent Center Edge	MSG/SC				■	■	■

RAL COLORS

Std.



Opt.

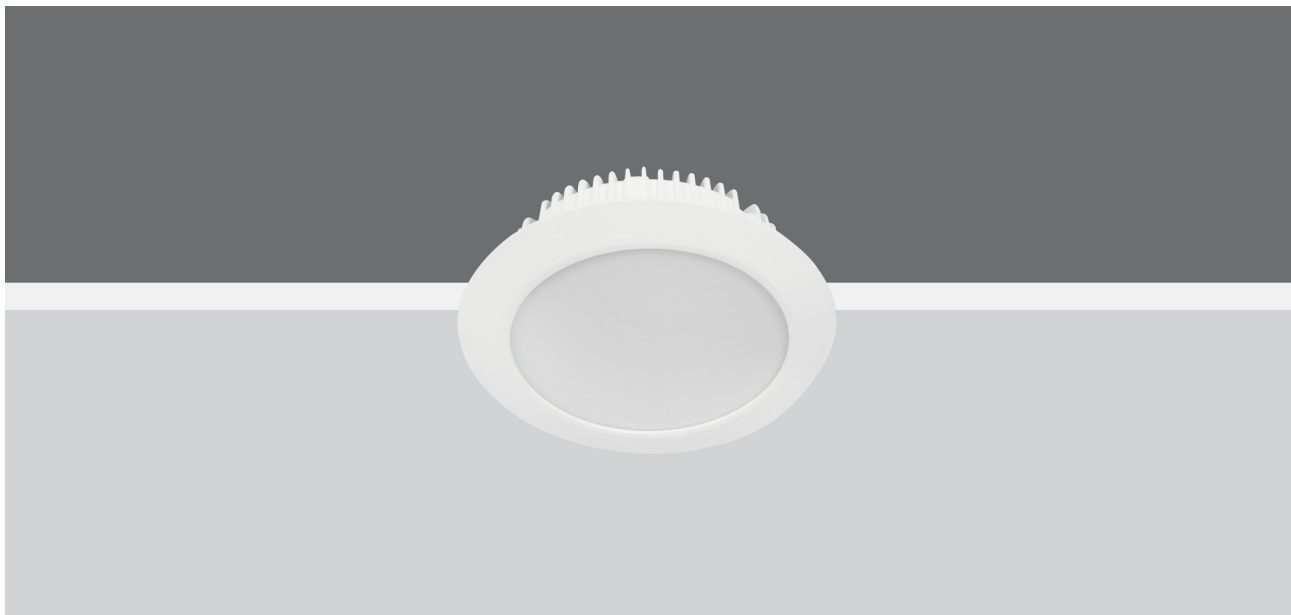

MSG/O


IP20

Code	Luminous Flux	System Power	Weight
MSG 160/O 14	1.300 lm	14 W	0.85 Kg
MSG 160/O 20	1.900 lm	20 W	0.85 Kg
MSG 160/O 27	2.565 lm	27 W	0.85 Kg
MSG 200/O 14	1.360 lm	14 W	1 Kg
MSG 200/O 20	1.950 lm	20 W	1 Kg
MSG 200/O 27	2.600 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: PMMA Opal

Beam Angle: 113°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

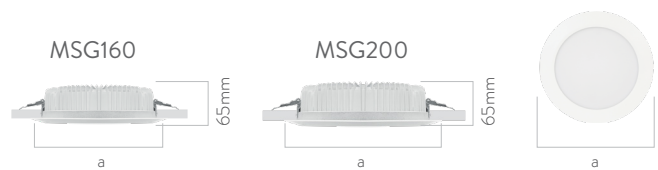


Code	a	Cut-Out
MSG160/O	Ø202 mm	Ø178 mm
MSG200/O	Ø235 mm	Ø206 mm




BOX DIMENSIONS
 MSG 160 25x25x12 cm
 MSG 200 28.5x28x12 cm



BOX WEIGHT
 MSG 160 1.1 kg
 MSG 200 1.3 kg



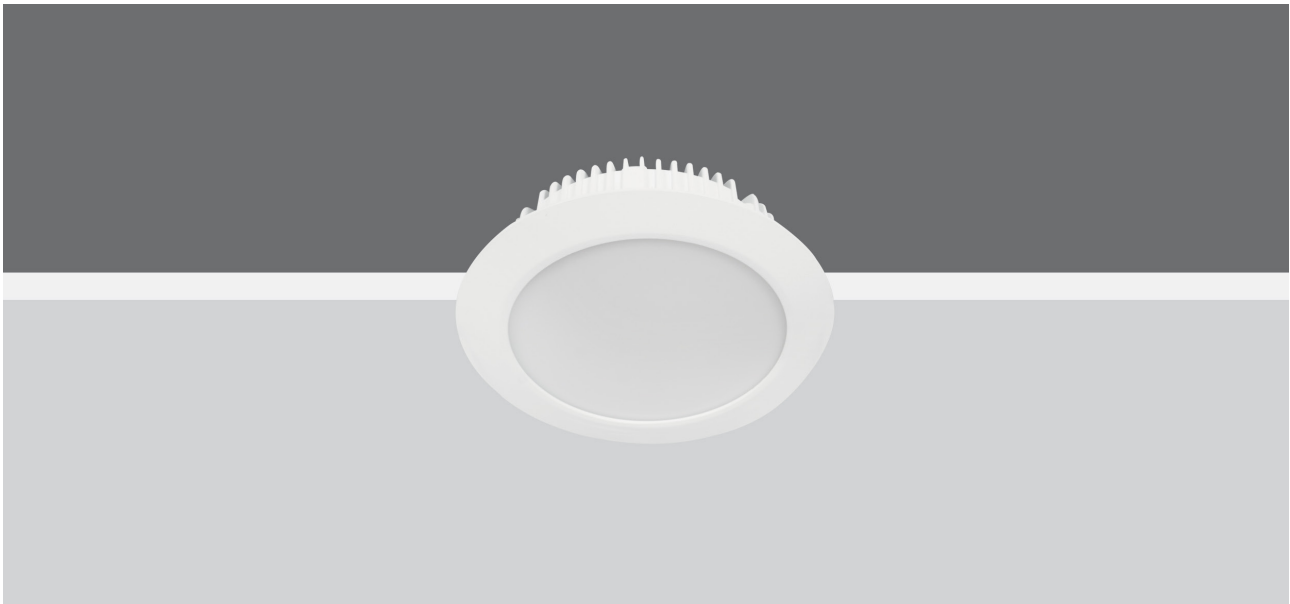

RAL COLORS

Std.

9016

Opt.

9005

9006

MSG/WP

IP54  

Code	Luminous Flux	System Power	Weight
MSG 160/WP 14	1.300 lm	14 W	0.85 Kg
MSG 160/WP 20	1.900 lm	20 W	0.85 Kg
MSG 160/WP 27	2.565 lm	27 W	0.85 Kg
MSG 200/WP 14	1.360 lm	14 W	1 Kg
MSG 200/WP 20	1.950 lm	20 W	1 Kg
MSG 200/WP 27	2.600 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: PMMA Opal

Beam Angle: 113°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




Code	a	Cut-Out
MSG160/WP	Ø202 mm	Ø178 mm
MSG200/WP	Ø235 mm	Ø206 mm



BOX DIMENSIONS
 MSG 160 25x25x12 cm
 MSG 200 28.5x28x12 cm



BOX WEIGHT
 MSG 160 1.1 kg
 MSG 200 1.3 kg



RAL COLORS

Std.

9016

Opt.

9005

9006



MSG/B


IP20

Code	Luminous Flux	System Power	Weight
MSG 200/B 20	1.700 lm	20 W	1 Kg
MSG 200/B 27	2.400 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: Prismatic Glass

Beam Angle: 100°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

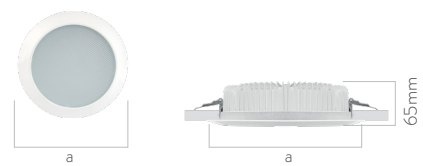


Code	a	Cut-Out
MSG200/B	Ø235mm	Ø206mm



BOX DIMENSIONS
285x280x120 mm



BOX WEIGHT
1.3kg



cd/klm
 — C0 - C180 — C90 - C270



RAL COLORS


Std.

9016

Opt.

9005

9006

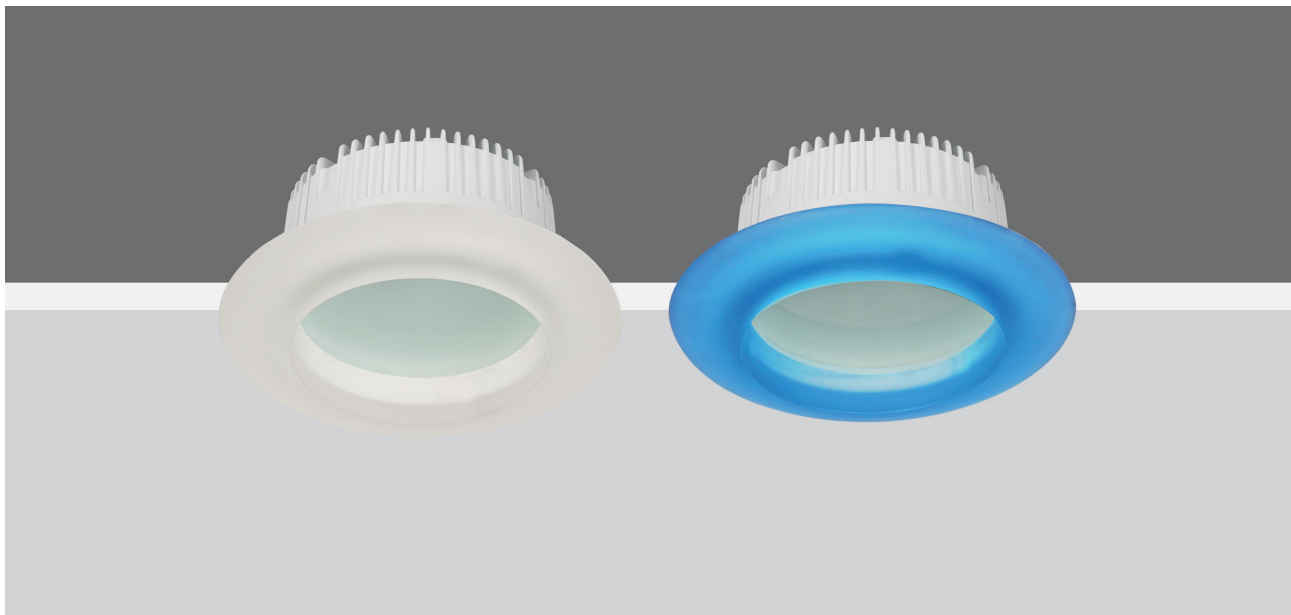
MSG/DC

IP20

Code	Luminous Flux	System Power	Weight
MSG 160/DC/B 14	710 lm	14 W	1.75 Kg
MSG 160/DC/B 20	1.100 lm	20 W	1.75 Kg
MSG 160/DC/B 27	1.650 lm	27 W	1.75 Kg
MSG 160/DC/W 14	990 lm	14 W	1.75 Kg
MSG 160/DC/W 20	1.170 lm	20 W	1.75 Kg
MSG 160/DC/W 27	1.690 lm	27 W	1.75 Kg

Body: Aluminum Injection
Driver: Included
Front Glass: Special die-cast glass for decorative purpose.
 Ring shape combined with flat inner glass

Beam Angle: 75°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




Code	a	Cut-Out
MSG160/DC	Ø220 mm	Ø178 mm




BOX DIMENSIONS
 25x25x12 cm



BOX WEIGHT
 2.3kg



cd/klm
 — C0 - C180 — C90 - C270

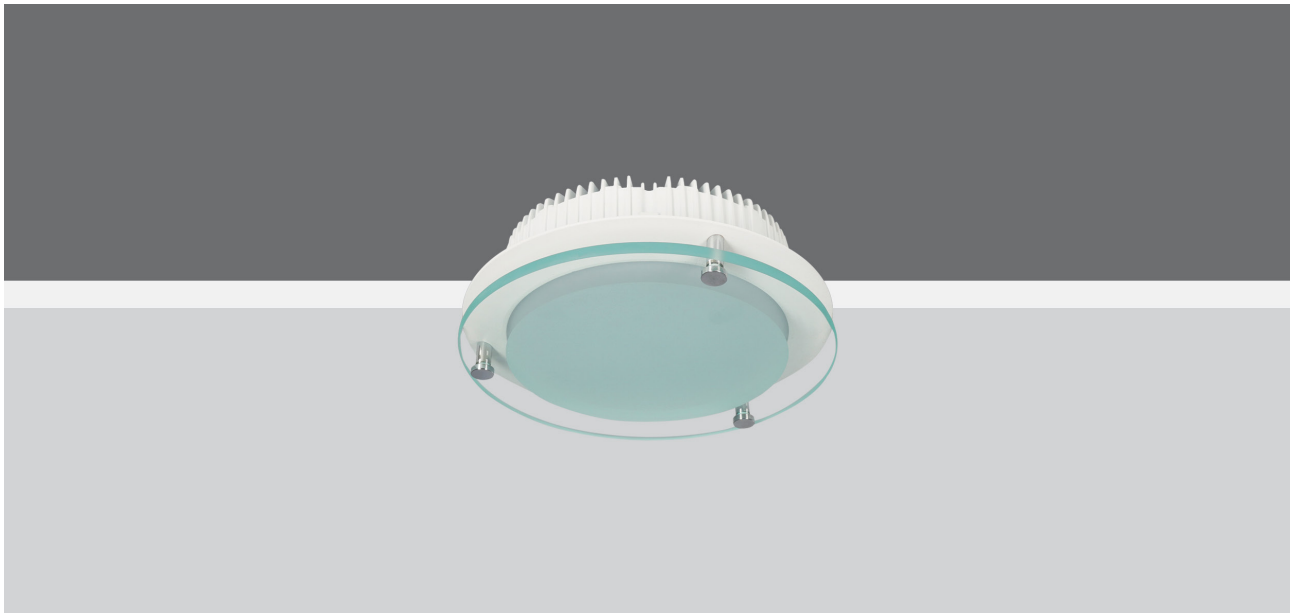

RAL COLORS

Std.

9016

Opt.

9005

9006

MSG/SC

IP20  

Code	Luminous Flux	System Power	Weight
MSG 200/SC4 20	1.310 lm	20 W	1.5 Kg
MSG 200/SC4 27	1.800 lm	27 W	1.5 Kg
MSG 200/SC2 20	1.100 lm	20 W	1.8 Kg
MSG 200/SC2 27	1.550lm	27 W	1.8 Kg

Body: Aluminum Injection

Driver: Included


Front Glass: 8mm thick tempered Glass

Beam Angle: 90°

Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K

Led: Mid-Power

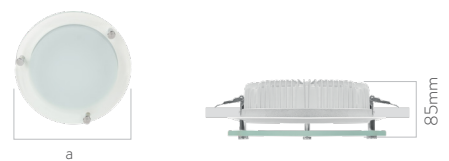

Code	a	Cut-Out
MSG200/SC	Ø235 mm	Ø206 mm



BOX DIMENSIONS

SC2 28x28x12 cm
SC4 28x28x12 cm



BOX WEIGHT

SC2 2.3 kg
SC4 2 kg

