



Exit &

Emergency Fixtures

They are emergency and exit signs that are used in areas where security is indispensable such as offices, retailers, shopping malls, etc. They have single or double sided and suitable for every kind of ceilings. They are both decorative and functional with their 1 or 3 hours duration time.

EXIT & EMERGENCY FIXTURES



Slim Signal



Description

Slim signals single and double-sided models can be mounted on any wall and ceiling with the use of support elements. Cold cathode technology is applied.

Code

Single Sided EXIT Signs

38026 (Left Side Arrow) 8W
38024 (Right Side Arrow) 8W
38028 (Down Arrow) 8W

Double Sided EXIT Signs

38216 (Right-Left Side Arrow) 8W
38214 (Down Arrow) 8W

Lamp

8W
8W
8W

Color

White
White
White

Box Dimensions

Inside box 1 PCS.
38026 230x270x50 mm
38024 230x270x50mm
38028 230x270x50mm

Weight

38026 1.150 gr.
38024 1.150 gr.
38028 1.150 gr.

Protection: IP42

Dimensions



CNC



Description

Body: Made of 1 mm thick DKP sheet steel and painted with min. 80 micron electrostatic powder paint.

Code

CNC

Lamp

1x8 W

Color

White

Box Dimensions

Inside box 1 PCS.
CNC 260x365x70 mm

Weight


CNC 3.000 gr

Protection: IP20



Suspension
Wire

Dimensions

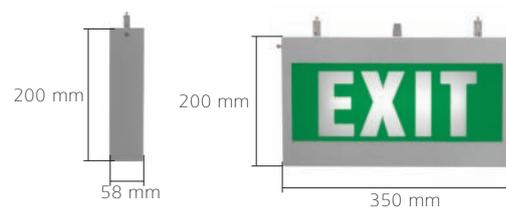

EXIT & EMERGENCY FIXTURES



Enex



Description

Maintained and non maintained direction indicating emergency light. Single sided screen. Manufactured in self-extinguishing and fire retardant polycarbonate according to CEI-21, CEI 60598-2-22 The latest generation of sealed and rechargeable Ni-Cd batteries for high temperature
Supply: 230V. 50 Hz
Duration: 1-3 h

Code	Lamp	Color
Enex	8W L	White

Box Dimensions	Weight
Inside box 1 PCS. ENEX 135x370x95 mm	Inside box 1 PCS. ENEX 18 1.150 gr ENEX 28 1.300 gr
Protection: IP65	

Enex Exit



Description

Maintained and non maintained direction indicating emergency light. Single sided screen. Manufactured in self-extinguishing and fire retardant polycarbonate according to CEI-21, CEI 60598-2-22 The latest generation of sealed and rechargeable Ni-Cd batteries for high temperature
Supply: 230V. 50 Hz
Duration: 1-3 h

Code	Lamp	Color
Enex (Left Side Arrow)	8W L	White
Enex (Right Side Arrow)	8W L	White
Enex (Down Arrow)	8W L	White

Box Dimensions	Weight
Inside box 1 PCS. ENEX 135x370x95 mm	Inside box 1 PCS. ENEX 18 1.150 gr ENEX 28 1.300 gr
Protection: IP65	

Dimensions

