



Floodlights

MDL

IP66

MDL projectors are the most suitable solution for various outdoor lighting projects thanks to their high efficiency and various power(W) options. There are types with high luminous flux and lens types at angles suitable for the area to be illuminated.


The luminaires are easily mounted with the foot mechanism. When it is brought to the desired angle, the spring and gear mechanism fully locks the armature. In this way, angle shifts are prevented over time.



MDL4




MDL3




MDL2



MDL1



Code	a
MDL4	590 mm
MDL3	500 mm
MDL2	410 mm
MDL1	240 mm

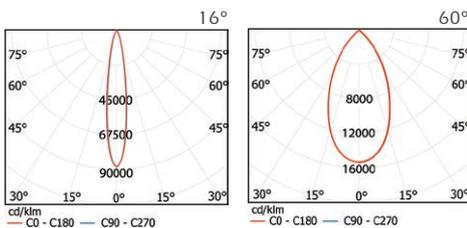

Code	MDL4	MDL3	MDL2	MDL1
LED	High Efficiency Power Led			
System Power	200W	150W	100W	50W
Light Flux	21.000 lm	16.000 lm	10.800 lm	5.500 lm
Color Temperature	3000 K 4000 K 5000 K			
Voltage	220V - 50Hz			
Body	Aluminum			
Cooler	Aluminum injection			
Diffuser	Clear polycarbonate			
Weight	9.700 gr	8.100 gr	6.500 gr	